


## Electric Bathroom Accessories

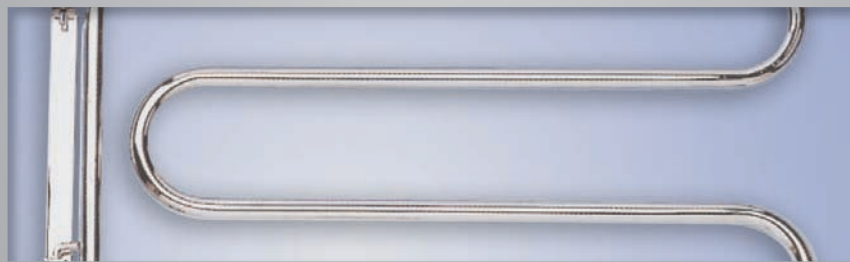

# Electric Towel Rails

Electric elements have a built in thermostat and internal cut out ensuring safety.

The TR Series perfects simplistic design and practicality.

The evenly spaced rails make the TR Series ideal for drying towels.

Its generous gaps allow bulky fabrics to be draped over with ease.

## TR1/400 >>

Height 700 mm  
Width 400 mm  
Depth 90 mm

## TR1/500C/C ≡ (curved)

Height 700 mm  
Width 500 mm  
Depth 90 mm





The H Series combines sleek design and superb functionality. Its additional clustered bars provide enhanced towel warming and drying. H Series models can also be used to deliver ambient bathroom heating (subject to sizing and finish).

### « H2/500

Height 700 mm  
 Width 500 mm  
 Depth 90 mm

### H3/500 »


Height 1100 mm  
 Width 500 mm  
 Depth 90 mm

### H3/600 »

Height 1100 mm  
 Width 600 mm  
 Depth 90 mm

### H3/500C/C » (curved)

Height 1100 mm  
 Width 500 mm  
 Depth 90 mm

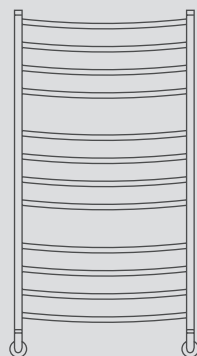

# Electric Towel Rails



« H4/500

Height 1500 mm

Width 500 mm

Depth 90 mm

« H4/600

Height 1500 mm

Width 600 mm

Depth 90 mm



≈ SHWA CP  
Hard-wire attachment

## TR & H SERIES MODELS:

TR Series & H Series listed width are measured from centre to centre of vertical tubes. Allow an additional 25 mm for the total width of the unit and an additional 40 mm for total width of brackets.

## ELECTRIC TOWER RAIL OPTIONS

All Hydrotherm Electric Towel Rails come with the electric element fitted in the bottom left/right vertical tube (Element sides are interchangeable: standard left unless specified).

### WIRING OPTION 1

#### Plug in version

Plug is supplied with element cable (1500 mm long). Cable may be cut and plug attached to required length.

### WIRING OPTION 2

#### Hard-wired version

The cable may be hard-wired into the wall with an element attachment. This accessory is an optional extra and must be installed by a qualified electrician.


All hard-wired elements have an IPX Rating of IP55. (IPX5) for use in wet areas. Hydrotherm also recommend all electric towel rails be connected to a timer for convenience and to prolong the life of the element.

### WIRING OPTION 3

#### Double hard-wired version

An optional second hard-wire attachment and fitting are available to match the existing single hard-wire attachment.

#### Plug in version

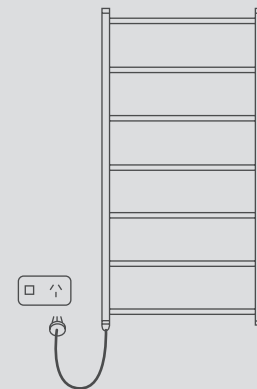


#### Hard-wired version



#### Double hard-wired version



#### Hard-wire attachment

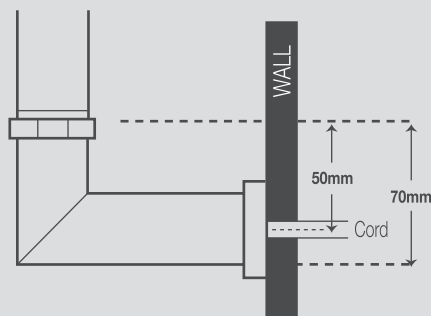

## ELECTRIC ELEMENTS:

All Hydrotherm Elements carry the following approvals.



# IP55

Elements have a built in thermostat and internal cut out ensuring safety and energy efficiency. All Hydrotherm electric elements can be supplied as 240 v or 110 v.

**All electric elements are replaceable and can be easily changed over.**



## Electric Towel Rails



The S Series introduces a new dimension to the Hydrotherm range. The heated towel shelf provides a modern and fashionable solution for storing and presenting warm, dry towels. With clean lines and featured contours the S Series is the perfect combination of flair and functionality.

« S/700

Height	300 mm
Width	700 mm
Depth	280 mm



The versatile M Series Towel Rail is a free standing warmer that gives you freedom to move between rooms with ease. Stylish appearance combined with portable convenience provide an attractive solution for drying towels and excess laundry.

« M/500

Height 1000 mm  
Width 500 mm  
Depth 270 mm

## Electric Towel Rails



≈ 159

Height 1080 mm  
Width 500 mm  
Depth 80 mm  
Finishes Chrome / Satin Chrome



≈ 146


Height 460 mm  
Width 500 mm  
Depth 80 mm  
Finishes Chrome / Satin Chrome



≈ 156


Height 710 mm  
Width 500 mm  
Depth 80 mm  
Finishes Chrome / Satin Chrome



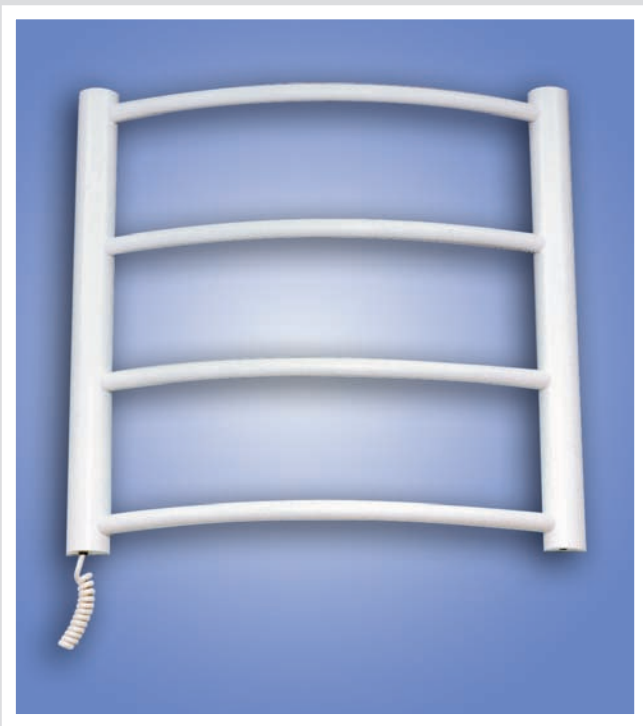



≈ 124

Height 600 mm  
 Width 600 mm  
 Depth 120 mm  
 Finishes Chrome / Satin Chrome / White

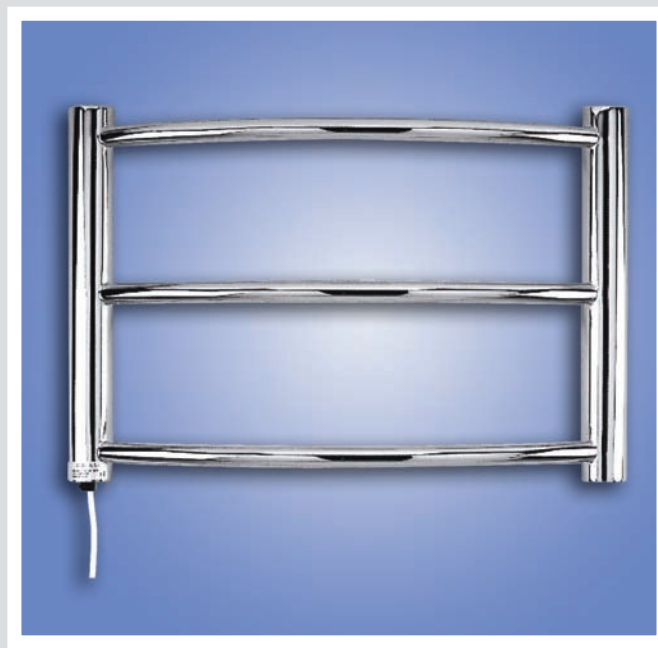

≈ 123

Height 450 mm  
 Width 600 mm  
 Depth 120 mm  
 Finishes Chrome / Satin Chrome / White

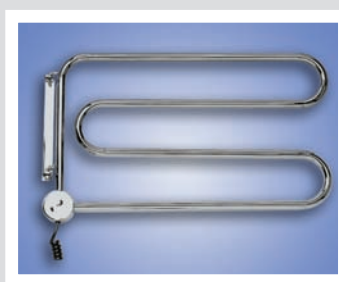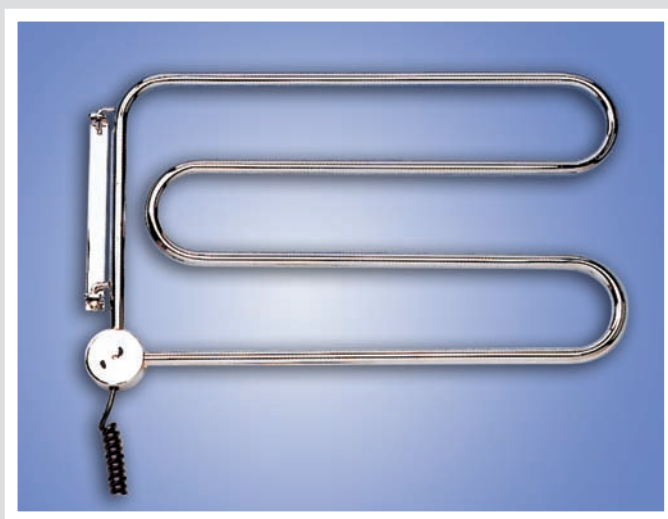

« 102

Height 380 mm  
 Width 580 mm  
 Depth 60 mm  
 Finishes Chrome / Satin Chrome

# Automatic Hand Dryer

**veltia**

Voltage : 210 - 240 V  
 Frequency : 50 - 60 Hz  
 Power : 2.200 VA  
 Current : 9.8A @ 220Vac  
 Electrical Isolation : Class II  
 Air Speed : 50 m/s  
 Drying Time : 10 - 15s  
 Dimensions : 575h x 300w x 195d mm  
 Weight : 9.3 kg  
 Protection Level : IP33



white

red



aluminium




1500A ≙

Performance : 30 seconds drying time  
 Sound level : 60 dB(A) at 1 metre  
 Motor : 2450 rpm induction motor  
 Power consumption : 1.85 kw at 240 V  
 Air flow : 170 cfm/hour  
 Operation : Infra-red sensor with 40 seconds automatic shut-off built in electronic timer.  
 Exit air temperature : Not exceeding 40 deg. C.  
 Dimensions : 280h x 275w x 143d mm  
 Weight : 3 kg (3.3 kg packed)



≪ 2000ST

Cover : Satin polished stainless steel  
 Sound level : 74 dB(A) at 1 metre  
 Rated at : 2.4 kw at 230 V  
 Dimensions : 280h x 270w x 148d mm  
 Weight : 5.8 kg (6.4 kg packed)

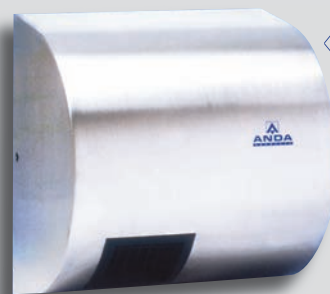

≪ 5000STS

Sound level : 74 dB(A) at 1 metre  
 Motor : 7000 rpm brushed motor  
 Power consumption : 2.4 kw at 230 V  
 Operation : Infra-red sensor with 40 seconds automatic shut-off built in electronic timer.  
 Exit air temperature : Not exceeding 40 deg. C.  
 Dimensions : 275h x 264w x 177d mm  
 Weight : 5.8 kg (6.4 kg packed)

# Wall-mounted Hair Dryer



« 822026

### Wall-mounted hair-dryer with options

- Safety - Patented - on/off - system operates when hose is moved (unit starts automatically when removed from the base and stops immediately whenever the hose is vertical, even if has not been replaced in the base).
- Low noise - Vibration reduction system in the casing.
- Heating element protected against overheating.

Power consumption : 800 w at 230 V

Hose length : 45 cm (stretches to 1.35 m)

Dimensions : 400h x 225w x 105d mm



822138 ≈



≈ 5012

### Hair-dryer TURBO 1250 SILENT

- with spiral cord connected to the wall mounted holder.
- 1250/625 W
- Rapid drying power
- Super silent
- With concentrator
- Can be plugged in or permanently connected.
- Wall mounted holder with separate ON/OFF switch.



≈ 844039

### Manual Liquid Soap Dispenser

- Design - The transparent body makes it easy to check the soap level at all times.
- Compact - Its small size facilitates installation in small sanitary facilities.
- User-friendly - Convenient and easy to use.

Capacity : 0.9 litres

Single dose : 1.5 to 2 ml.


# Fog Free Mat

The fog free mirror heater mat prevents bathroom mirrors from steaming up. No longer is it necessary to suffer the frustration of having to continuously wipe the mirror after a bath or shower, instead the mirror remains crystal clear over the area heated by the mat.


- Mat thickness 1 mm, cord restraint thickness 7 mm.
- Cable lead fitted with cord restraint, cable fitted is 2 core oval, type 2192Y to BS6500, length 50 cm.
- Power rating for 50 cm square mat-80 W at 240 V.
- Maximum temperature on front face of mirror after six hours is approximately 40 °C, depending on ambient conditions.
- Additional advantages with FOG FREE MIRRORS:
  - prevents moisture damage to silver coating.
  - retains mirror in place in the event of breakage.
  - suitable in hotel guest toilet, residential toilet, beauty shop & club house.



Model available			
Dims mm	A	B	Heated Area
HM0-14	515	724	500 X 700
HM0-1	515	524	500 X 500
HM0-2	515	324	500 X 300

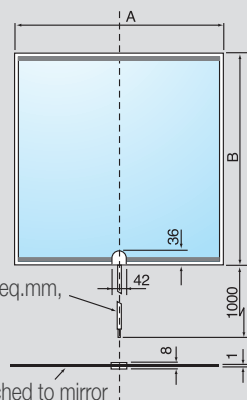

## Correct Installation Procedures

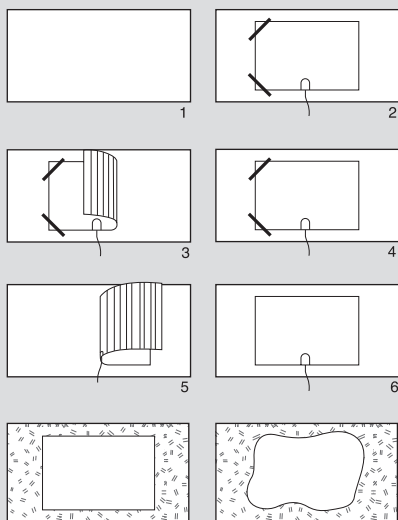


Correctly fitted


Badly fitted

## Recommended Methods of Fitting

1. Flush mounting with wall tiles.

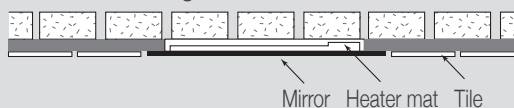

2. Within a recess.

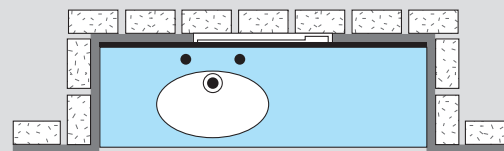

3. Within a wooden or plastic frame.

