



[www.ebon.com.hk](http://www.ebon.com.hk)

ELECTRIC BATHROOM ACCESSORIES





TR1/400 TRI/500 TRI/600

|        |        |        |        |        |        |
|--------|--------|--------|--------|--------|--------|
| Height | 700 mm | Height | 700 mm | Height | 700 mm |
| Width  | 400 mm | Width  | 500 mm | Width  | 600 mm |
| Depth  | 90 mm  | Depth  | 90 mm  | Depth  | 90 mm  |

# Electric Towel Rails





H2/500

Height 700 mm  
Width 500 mm  
Depth 90 mm

H2/600

Height 700 mm  
Width 600 mm  
Depth 90 mm

H2/800

Height 700 mm  
Width 800 mm  
Depth 90 mm



H3/500

Height 1100 mm  
Width 400 mm  
Depth 90 mm

H3/500


Height 1100 mm  
Width 500 mm  
Depth 90 mm


H3/600

Height 1100 mm  
Width 600 mm  
Depth 90 mm

H3/500C/C  
(curved)

Height 1100 mm  
Width 500 mm  
Depth 90 mm

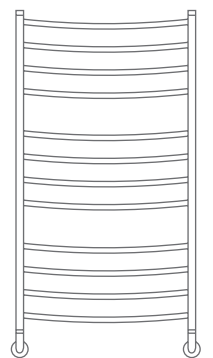

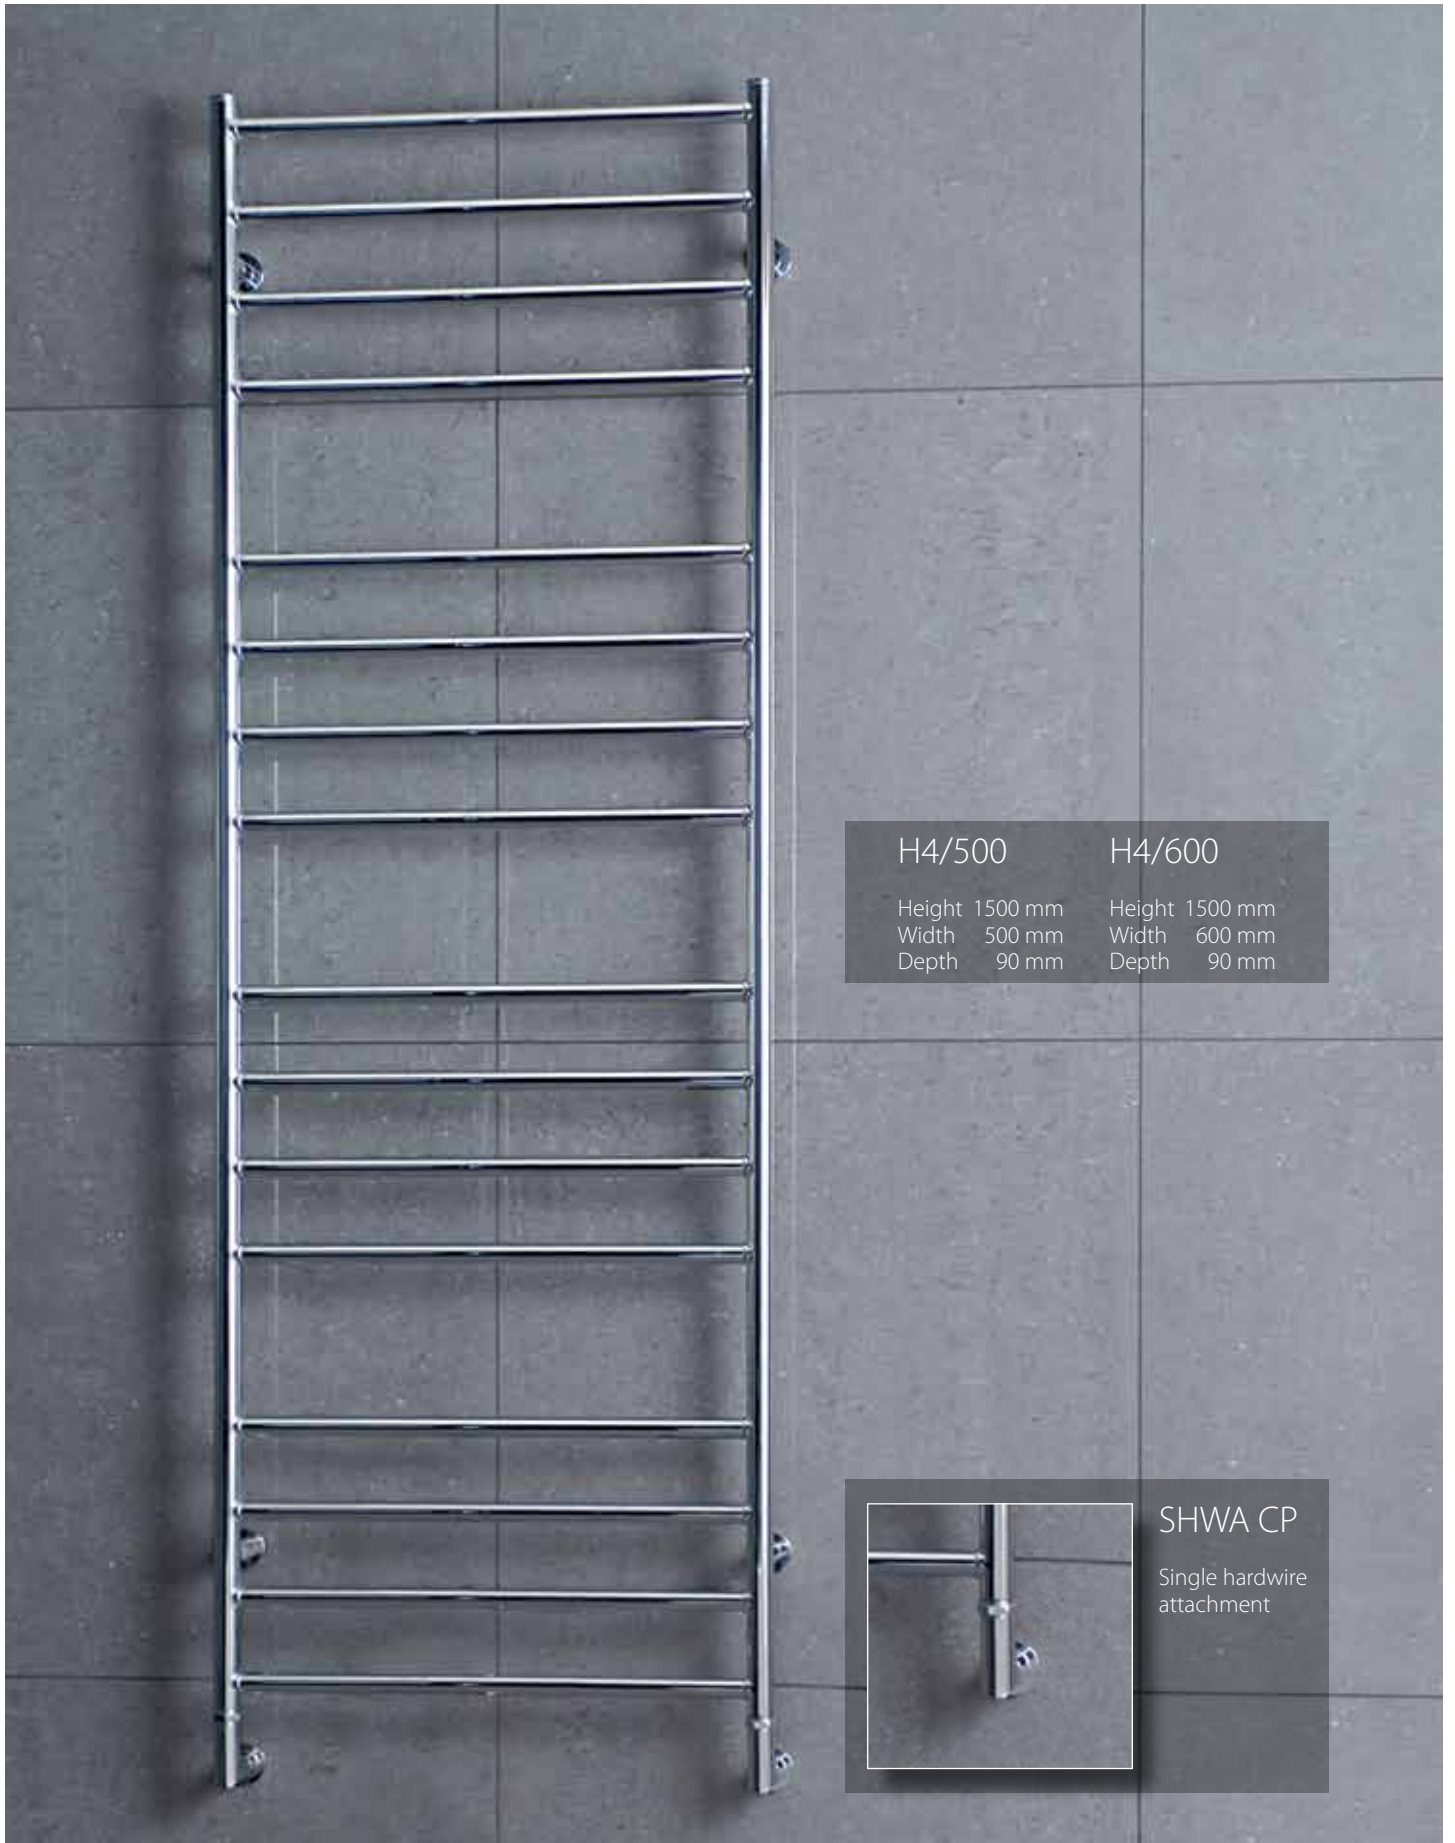

| H4/500 |         | H4/600 |         |
|--------|---------|--------|---------|
| Height | 1500 mm | Height | 1500 mm |
| Width  | 500 mm  | Width  | 600 mm  |
| Depth  | 90 mm   | Depth  | 90 mm   |



SHWA CP

Single hardwire attachment

# Electric Towel Rails





S/700

Height 300 mm  
 Width 700 mm  
 Depth 280 mm



HSW-2

Height 640 mm  
 Width 400 mm



M/500

M/600

Height 1200 mm  
 Width 500 mm  
 Depth 280 mm

Height 1200 mm  
 Width 600 mm  
 Depth 280 mm



HSW-3

Height 940 mm  
 Width 400 mm

# Technical Specifications

## TR & H SERIES MODELS:

TR Series & H Series listed width are measured from centre to centre of vertical tubes.  
Allow an additional 25 mm for the total width of the unit and an additional 40 mm for total width of brackets.

## ELECTRIC TOWER RAIL OPTIONS

All Hydrotherm Electric Towel Rails come with the electric element fitted in the bottom left/right vertical tube (Element sides are interchangeable: standard left unless specified).

### WIRING OPTION 1

#### Plug in version

Plug is supplied with element cable (1500 mm long).


Cable may be cut and plug attached to required length.



### WIRING OPTION 3

#### Double hard-wired version

An optional second hard-wire attachment and fitting are available to match the existing single hard-wire attachment.

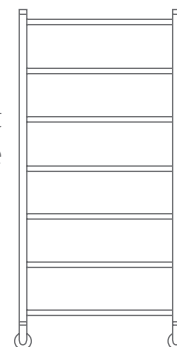

### WIRING OPTION 2


#### Hard-wired version

The cable may be hard-wired into the wall with an element attachment. This accessory is an optional extra and must be installed by a qualified electrician.

All hard-wired elements have an IPX Rating of IP55. (IPX5) for use in wet areas. Hydrotherm also recommend all electric towel rails be connected to a timer for convenience and to prolong the life of the element.



#### Hard-wired attachment

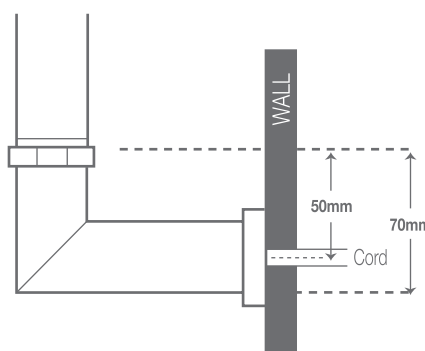

## ELECTRIC ELEMENTS:

All Hydrotherm Elements carry the following approvals.



# IP55


Elements have a built in thermostat and internal cut out ensuring safety and energy efficiency.

All Hydrotherm electric elements can be supplied as 240 v or 110 v.

**All electric elements are replaceable and can be easily changed over.**

# Electric Towel Rails



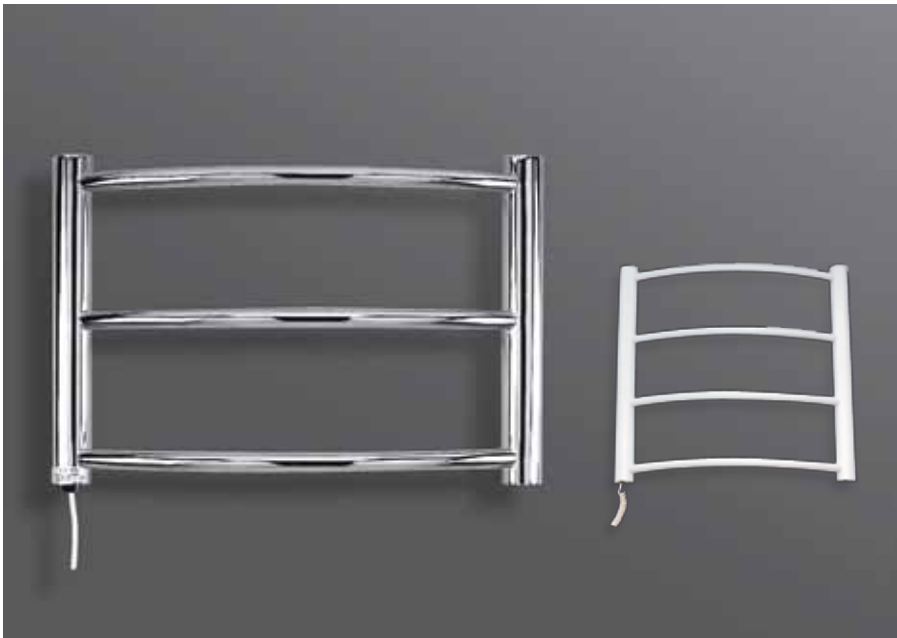

123

Height 400 mm  
Width 600 mm  
Depth 100 mm

Finishes Chrome / Satin Chrome / White



156

Height 700 mm  
Width 500 mm  
Depth 80 mm

Finishes Chrome / Satin Chrome



146

Height 450 mm  
Width 500 mm  
Depth 80 mm

Finishes Chrome / Satin Chrome



159

Height 1080 mm  
Width 500 mm  
Depth 80 mm

Finishes Chrome / Satin Chrome

# Electric Towel Rails



## FAST AND EFFICIENT DRYING

An innovative high speed system allows the VELTIA hand dryer to dry your hands in only 12 to 15 seconds, so you do not have to wait. The water removed from your hands is drained into the hand dryer to help maintain cleaner facilities.



## ECOLOGICAL SAVINGS

Thanks to the fast operation, the VELTIA hand dryer saves up to 85% of power consumption compared to other hand dryers. Furthermore, the VELTIA hand dryer can effectively substitute paper towels since it thoroughly dries your hands. That way, you do not generate waste. The VELTIA hand dryer is the most environmentally ecological choice for drying hands!

## HIGH SPEED DRYING

Our unique drying system is not based on hot air. Therefore there are no hot parts and no risk of burning for the user. Furthermore it does not cause that feeling of over drying in the skin of your hands but rather feels like a soft massage.

## ZERO SMELL

While using it, the VELTIA hand dryer diffuses active principles that react with bad smells present in the air. So while drying your hands, the hand dryer removes foul smells from the air, leaving a clean and fresh atmosphere. No other hand dryer in the world does that.

## MICROBAN

Microban® antibacterial protection technology is built in VELTIA during manufacturing. Thus VELTIA is doubly hygienic to use and the protection cannot wear away.

*!! Microban® antibacterial protection, as an integrated part of our product development is intended as a hygienic addition to normal cleaning practices, not a substitute.*

|                        |   |
|------------------------|---|
| Voltage                | : 220/230/240V~                                     |
| Frequency              | : 50/60 Hz  |
| Power consumption      | : 1760W/8A  |
| Current (Running)      | : 8.0A @ 230Vac                                     |
| Electrical Isolation   | : Class II  |
| Air Speed              | : 200 Km/h (125 Mph)                                |
| Drying Time            | : 10 - 15s  |
| Dimensions             | : 300 x 195 x 617 mm<br>11.81 x 7.67 x 24.29 inches |
| Weight                 | : 9.55 kg (21.1 lb)                                 |
| IP Code                | : IPX1  |
| Noise (@ 2 mt)         | : 70 dB   |
| Number of Motors       | : 2   |
| Motors Speed           | : 30.000 rpm  |
| Motors Driving System  | : Soft Starting                                     |
| Hands Detection System | : IR - Barrier                                      |

### Materials

Housing case and water tank made of High impact 2.6mm thick ABS with antibacterial protection in drying area. All plastic pieces are properly prepared for recycling.

VELTIA complies with following directives: ROHS (Restriction of Hazardous Substances) and RAE (Collection of electrical and electronic equipment and waste management)

ZeroSmell®: Must be changed every 3 months.



HD2NALSZ-V7  
NEW




HD2NSWSZ-V7  
NEW

# Automatic Hand Dryer







HD-240V-RF-32

Voltage : 210 - 240 V  
 Frequency : 50 - 60 Hz  
 Power : 2.200 VA  
 Current : 9.8A @ 220Vac  
 Electrical Isolation : Class II  
 Air Speed : 50 m/s  
 Drying Time : 10 - 15s  
 Dimensions : 575h x 300w x 195d mm  
 Weight : 9.3 kg  
 Protection Level : IP33

---

HD-240V-AL-32

Voltage : 210 - 240 V  
 Frequency : 50 - 60 Hz  
 Power : 2.200 VA  
 Current : 9.8A @ 220Vac  
 Electrical Isolation : Class II  
 Air Speed : 50 m/s  
 Drying Time : 10 - 15s  
 Dimensions : 575h x 300w x 195d mm  
 Weight : 9.3 kg  
 Protection Level : IP33



5012

**Hair-dryer TURBO 1250 SILENT**

- with spiral cord connected to the wall mounted holder.
- 1250/625 W
- Rapid drying power
- Super silent
- With concentrator
- Can be plugged in or permanently connected.
- Wall mounted holder with separate ON/ OFF switch.

# Hair Dryer





## 1500A

### Key Features:

- Approximately 30 seconds drying time

### Technical Specification:

- Double Insulated class II
- IP21 rated
- Air velocity 200m<sup>3</sup>/hr

### Product Range Details:

- Motor 4200rpm induction motor
- Rated 1.75Kw at 240V
- Supply Voltage 220-240V 50Hz
- Sound level 60dB(A) at 1 metre

**Dimensions:** 280 (h) x 275 (w) x 143(d) mm

**Weight:** 2.97kg



## 447444

### Key Features:

- Approximately 10 seconds drying time.
- Unique "blue dry zone" indicator.
- Powerful Operation.
- Fitted with Anti- bacterial dust filter.
- Low energy usage.
- 2 speed & 2 heat settings.

### Technical Specification:

- Insulation Earthed Class I
- CE marked in accordance with all the relevant EEC Harmonised Documents
- IPX4 Rated
- Air velocity 95m/s

### Product Range Details:

- Rating Range at 230volts 50/60Hz. 750 – 1850 watts
- Supply Voltage 220-240V 50Hz
- Heater Element- Can be switched off completely or adjusted 900-1300 watts
- Sound Level 76dB(A) at 1 metre

**Dimensions:** 685 (h) x 300 (w) x 220 (d) mm

**Weight:** 11kg



## 2000ST

### Key Features:

- Approximately 30 seconds drying time

### Technical Specification:

- Insulation Earthed Class I
- BEAB Approved
- IP24 Rated
- CE marked in accordance with all the relevant EEC Directives
- Air velocity 200m<sup>3</sup>/hr

### Product Range Details:

- Rated at 2.0kW at 240V
- Supply Voltage 220-240V/1/50Hz
- Motor 2700rpm external rotor motor
- Sound Level 65dB(A) at 1m

**Dimensions:** 280 (h) x 270 (w) x 148 (d) mm

**Weight:** 4.0kg



## 5000STS

### Key Features:

- Approximately 26 seconds drying time

### Technical Specification:

- Insulation Earthed Class I
- BEAB Approved
- IP24 Rated
- DEMKO Approved to comply with LVD
- CE marked in accordance with all the relevant EEC Harmonised Directives
- Air velocity 275m<sup>3</sup>/hr

### Product Range Details:

- Rated at 2.4kW at 230V
- Supply Voltage 220-240V 50Hz
- Motor 5500rpm brushed motor fitted with thermal fuse
- Sound Level 74dB(A) at 1m

**Dimensions:** 264 (h) x 275 (w) x 177 (d) mm

**Weight:** 6.0kg

# Automatic Hand Dryer





### HW-HM0-1


A 515mm  
B 524mm  
Heated Area 500 x 500 mm

### HW-HM0-2

A 515mm  
B 324mm  
Heated Area 300 x 500 mm

### HW-HM0-14

A 515mm  
B 724mm  
Heated Area 700 x 500 mm

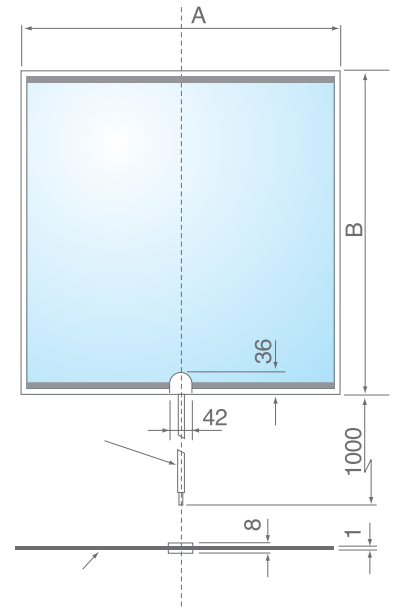


The fog free mirror heater mat prevents bathroom mirrors from steaming up. No longer is it necessary to suffer the frustration of having to continuously wipe the mirror after a bath or shower, instead the mirror remains crystal clear over the area heated by the mat.

- Mat thickness 1 mm, cord restraint thickness 7 mm.
- Cable lead fitted with cord restraint, cable fitted is 2 core oval, type 2192Y to BS6500, length 50 cm.


- Power rating for 50 cm square mat-80 W at 240 V.
- Maximum temperature on front face of mirror after six hours is approximately 40°C, depending on ambient conditions.
- Additional advantages with FOG FREE MIRRORS:
  - prevents moisture damage to silver coating.
  - retains mirror in place in the event of breakage.
  - suitable in hotel guest toilet, residential toilet, beauty shop & club house.

## Recommended Methods of Fitting


1. Flush mounting with wall tiles.

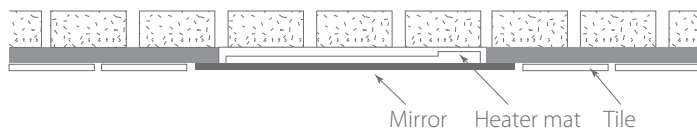


2. Within a recess.

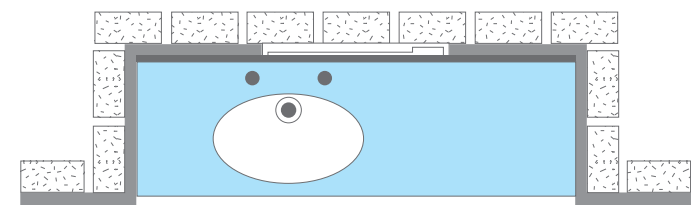

3. Within a wooden or plastic frame.




## Correct Installation Procedures

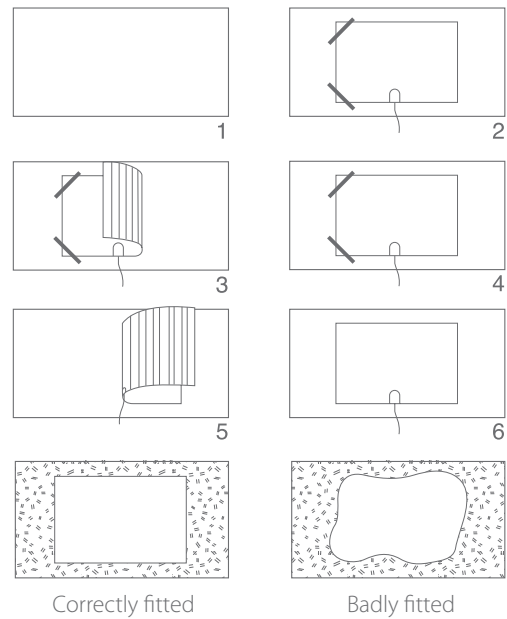

# Fog Free Mat



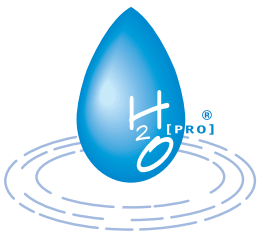

駱克道343號 駱克道345號 駱克道347號 駱克道287號 駱克道193號 1號電器街/星街 上海街664號 澳門雅廉訪大馬路12號  
t/3106-6008 t/2893-9118 t/2834-1661 t/2923-5090 t/2156-0388 t/3102-0808 t/2394-4411 t/(853)2833-2565

[www.ebon.com.hk](http://www.ebon.com.hk)

所有因人為疏忽、不正確安裝、錯用清潔物料而導致貨品損壞均不會由貴方負責。生產商因應產品改進而更正有關規格及條款不會先行通知。目錄內所有資料紙供參考，以產品實辦為準。(所有中文條文紙作參考，而以英文為準)  
The Seller shall be under no liability for any loss or damage resulting from misuse, neglect, omission or corrosion due to abnormal exposure to chemicals, adverse environment, accident to the product, force majeure or improper installation. **Manufacturers** may change specifications, terms and conditions without prior notice, products shown in the corresponding catalogue are for reference only. No warranty nor guarantee, expressed or implied is given.

支持環保·閱後請轉贈他人·Be eco-friendly, please pass this along to a friend.

